


HER201(G) – HER208(G)

2A 高效玻钝二极管

2A HIGH EFFICIENCY GPP DIODES

型号 TYPE	最大反向 峰值电压 Maximum Peak Reverse Voltage	最大平均正向电流 Maximum Average Rectified Current @ Half-Wave Resistive Load 60Hz		最大正向浪涌电流 Maximum Forward Peak Surge Current @ 8.3ms Superimposed	最大反向 漏电流 Maximum Reverse Current @ PRV @ T _A =25°C	最大正向电压 Maximum Forward Voltage @ T _A =25°C		最大反向 恢复时间 Maximum Reverse Recovery Time	外型尺寸 Package Dimensions
	PRV	I _O @ T _L		I _{FM} (Surge)	I _R	I _{FM}	V _{FM}	T _{rr}	
	V _{PK}	A _{AV}	°C	A _{PK}	μA _{dc}	A _{PK}	V _{PK}	ns	
HER201(G)	50						1.00	50	DO – 15
HER202(G)	100						1.00		
HER203(G)	200						1.00		
HER204(G)	300	2.0	50	60	5.0	2.0	1.30		
HER205(G)	400						1.30		
HER206(G)	600						1.85		
HER207(G)	800						1.85		
HER208(G)	1000						1.85		

 T_{rr} 测试条件: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

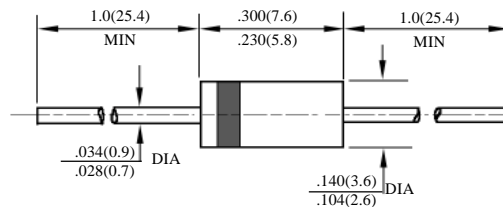 T_{rr} Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A


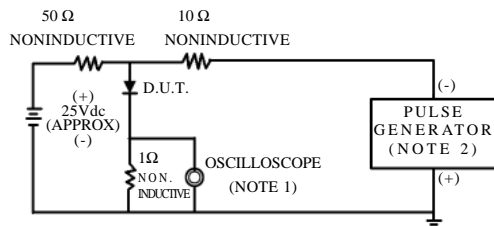
DO – 15

HER201(G) – HER208(G)

2A 高效率玻璃钝二极管额定值与特性曲线

2A RATING & CHARACTERISTIC CURVES OF HIGH EFFICIENCY GPP DIODES

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES: 1. Rise Time=7ns max.
Input Impedance=1megohm.22pF.
2. Rise Time=10ns max.
Source Impedance=50 ohms.




FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

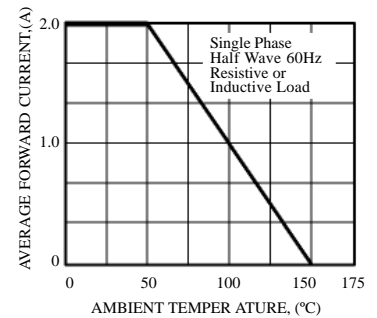


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

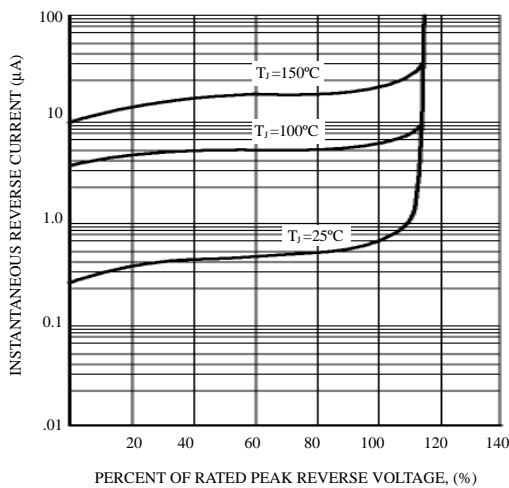


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

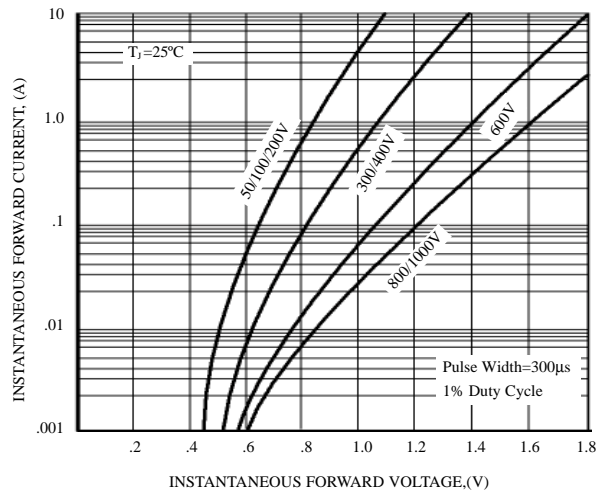


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


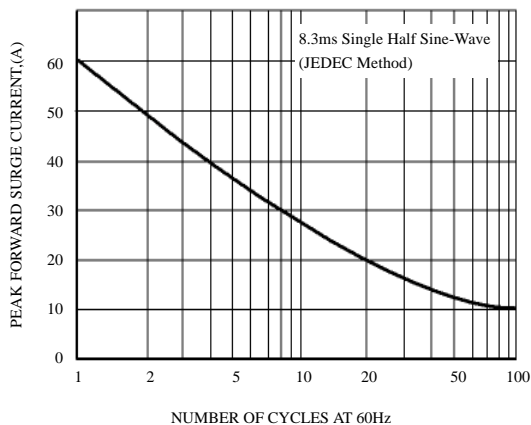


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

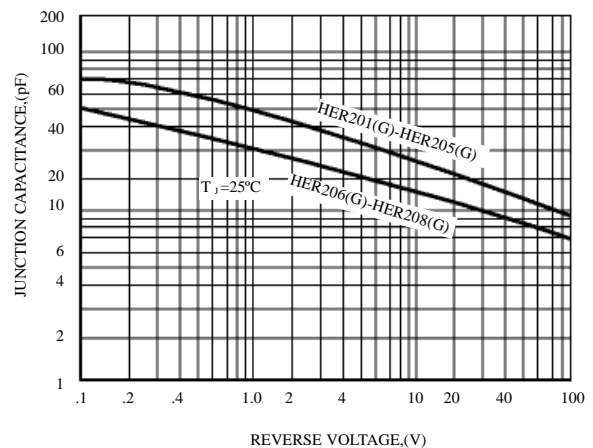

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.